

INSTRUCTION SHEET

Part Number

603-699

Part Includes

- 1 Bypass Unit
- 1 Set of Nylon Ties

Application: Corvette 1989–1995

CAGS 6-Speed Skip Shift Bypass







These genuine Packard plugs and seals will protect your wiring harness and allow you to re-connect the harness for full CAGS function, if you so desire.

STEP 1.

Disconnect your Corvette's negative battery cable from the battery. The stock cable color is black, but you should check the markings on the battery to be sure.

STEP 2.

To gain access to the CAGS harness, raise your Corvette as directed by the GM Shop Manual. Be sure the follow all safety precautions and use jack stands.

STEP 3.

The CAGS harness connectors are located on the driver's side of the transmission (see diagram). They are gray in color.

STEP 4.


Gently lift the locking clip and unplug the connectors. Make sure the connectors are clean, then install the connector seals on the corresponding ends. You may wish to wire tie the loose harness ends up out of the path of road debris.

STEP 5.

Lower Corvette according to GM Shop Manual procedures.

STEP 6.

Re-connect negative battery cable and test drive car.

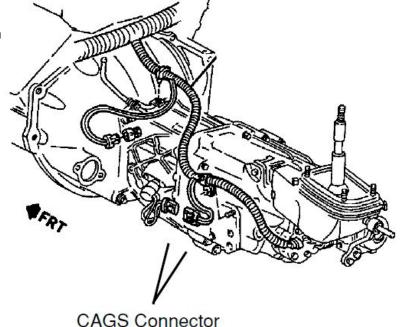





MAMotorworks



Midamotorworks



blog.autotainment.com

17082 N. US Hwy 45, P.O. Box 1368, Effingham, IL 62401 800.500.1500 · Worldwide: 217.540.4200 · FAX: 217.540.4800 www.mamotorworks.com · mail@mamotorworks.com

©Mid America Motorworks, Inc. All rights reserved.