



Toll Free: 87 PERMATEX  
(877-376-2839)

6875 Parkland Boulevard, Solon  
Ohio 44139

# Technical Data Sheet

## Permatex® Disc Brake Quiet

AAM Revised 01/20

### PRODUCT DESCRIPTION

Permatex® Disc Brake Quiet is a thick blue paste with superior adhesion properties designed for use with metallic, semi-metallic and standard brake pads.

### PRODUCT BENEFITS


- Compatible with anti-lock brake systems
- Eliminates disc brake squeal
- Protects against corrosion
- Allows for easy disassembly
- For use on all cars and trucks

### TYPICAL APPLICATIONS

- Back side of all disc brake pads
- Outboard and inboard pads for disc braking systems

### DIRECTIONS FOR USE

1. Remove the lug nuts holding the wheel assembly in place.
2. Remove the pins (or bolts) holding the caliper assembly to access the brake pad.
3. Clean the back side of brake pad with Permatex® Brake and Parts cleaner and wipe clean.
4. Apply a thin coat of Disc Brake Quiet to the back side of the disc pad.

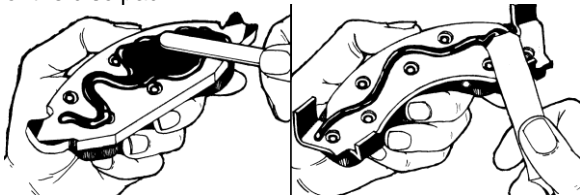

5. Do not apply on the side that comes into contact with the rotor.
6. Allow to dry a minimum of 10 minutes.
7. Reassemble.

### For Cleanup

1. Clean off excess material with Permatex® Brake and Parts Cleaner.
2. Clean hands with a dry cloth or Permatex® Fast Orange hand cleaner.

### PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Acrylic polymer emulsion
Appearance	Blue paste
Odor	Mild
Specific Gravity	.91
Viscosity	Flow similar to SAE 40 Motor
Oil Flash Point, TCC, °F	53

### TYPICAL CURING PERFORMANCE

Permatex® Disc Brake Quiet should dry for a minimum of 10 minutes prior to reassembly. Full dry time is a minimum of three hours. Cure times will vary with temperature, humidity and gap.

### PERFORMANCE OF CURED MATERIAL

Permatex® Disc Brake Quiet is resistant to diesel fuel, ethylene glycol, ethylene glycol/water mixtures, water, greases and brake fluids.

### GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

### ORDERING INFORMATION

Part Number	Container Size
80728 (126H)	4 fl. oz. brush-top bottle
82017 (126HB)	4 fl. oz. squeeze bottle
80729 (126VR)	2.5 fl. oz. pouch, carded

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including loss profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.  
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.  
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., 6875 PARKLAND BOULEVARD, SOLON, OH 44139 PHONE - (1-87PERMATEX)