



Application: C6 2005-2013



Search: **Exterior Lightening**
www.mamotorworks.com

Part Includes

1 - Third Brake Light Pulsar
Harness

Third Brake Light Pulsar



Tools Needed



DIRECTIONS FOR SAFE AND PROPER APPLICATION

The C6 Corvette Brake Light Pulsar is a fully "Plug-N-Play" harness that plugs into your existing Center High Mount Brake Light. There are no wires to cut, and no adjustments to make.

STEP 1.

Using a T15 Torx driver, remove the right, inside tail light fixture (closest to the center of the car). If you are a "Lefty", remove the left, inside tail light fixture.

STEP 2.

Reach into the opening and disconnect the 2-pin connector attached to the third brake light. You must pull the retaining tab back to release the lock as you pull the connector straight out. Gently pull the connector out the hole in the bumper.



STEP 3.

Connect this 2-pin connector to the mating connector on the BLP harness. Note the correct orientation and seat the connector until it snaps into place.

STEP 4.

Plug the remaining connector from the BLP harness into the third brake light. Again, note the correct orientation and seat the connector until it snaps into place.

With the ignition ON, stand behind the car and look at the center high mount brake lamp. Ask someone to press the brake pedal. The lamp will pulse on and off for about a second, then it will stay on. Ask the person to release the brake pedal, and the lamp will turn off. If you press the pedal again within 15 seconds, the lamp will not pulse, it will just come on like normal. Release the pedal and wait 15 seconds or more. Press the pedal again, and the lamp will pulse then turn on.

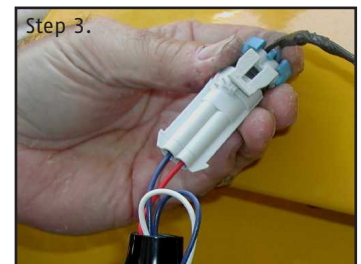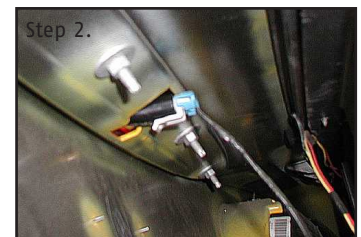

Mamotorworks



@CorvettePassion



MidAmericaMotorworks



CorvettePassion

2900 North Third Street, Effingham, IL 62401
800.500.1500 • Worldwide: 217.540.4200 • FAX: 217.540.4800
www.mamotorworks.com • generalmail@mamotorworks.com
©Mid America Motorworks, Inc. All rights reserved.